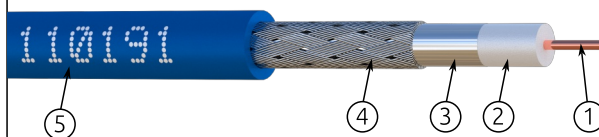
**elbaC Cable**

ZAC sous le Beer - RD 836
F-27730 BUEIL (Eure - France)
Tél : +33 (0)2 32 62 00 92
Fax : +33 (0)2 76 01 31 80
www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** ①

Material	Annealed copper
Diameter	$\varnothing 0.8 \pm 0.005$ mm

Dielectric ②

Material	Cellular PE Physical
Color	Natural
Diameter	$\varnothing 3.65 \pm 0.10$ mm

Outer conductor**1st Layer** ③

Material	Thick Alu 40 μ m/Polyester/Alu tape
Coverage	$\geq 125\%$

2nd Layer ④

Material	Tinned Copper
Braiding	16 \times (6 \times $\varnothing 0.12$ mm)
Coverage	78%

Sheath ⑤

Material	PVC - Flam retardant C2
Color	Blue - RAL 5017
Diameter	$\varnothing 6.10 \pm 0.15$ mm

Weight

Linear mass	35 kg/km
-------------	----------

Marking of sheath

Printing	VN6 R - HD SDI - 75 OHMS - CE - with XXX : Quantity in meter still available per reel DDDDD : Date code
----------	--

Color / Process	White / Ink jet
-----------------	-----------------

Step	1m
------	----

Stripping force / 50 mm (F)

Dielectric	$15 \text{ N} \leq F \leq 35 \text{ N}$
------------	---

Meet Standards

Marking :	CE
Fire reaction :	EN 50575:2014/A1:2016 F _{ca}
Fire Performance :	IEC 60332-1 NF C 32-070 Classe C2
Environment :	European directive 2011/65/EU

Electrical characteristics

Impedance	$75 \pm 2 \Omega$
-----------	-------------------

Capacitance	< 58 pF/m
-------------	-------------

Max DC Resistance at 20°C

Inner conductor	37 Ω /km
-----------------	-----------------

Outer conductor	17.2 Ω /km
-----------------	-------------------

Propagation velocity	81%
----------------------	-----

Rated voltage	30 V
---------------	------

Insulation resistance at 20°C	> 500 M Ω /km
-------------------------------	------------------------

Longitudinal attenuation

Frequency MHz	Max attenuation dB/100m
5	1.8
30	5.6
100	7.9
300	13.9
400	16.1
1000	26.3
2150	39.7
3000	47.8

Return loss

Frequency MHz	Return loss dB
[30 - 1000]	> 23

Screening attenuation

Attenuation 30 - 2000 MHz	> 80 dB
---------------------------	-----------

Attenuation 2000 - 3000 MHz	> 85 dB
-----------------------------	-----------

Thermal characteristics

CPR fire reaction class	F _{ca}
-------------------------	-----------------

Rated temperature	80°C
-------------------	------

Packaging

- R3	: 300m / Easy Reel Box
- W5	: 500m / Wooden Drum

Notes