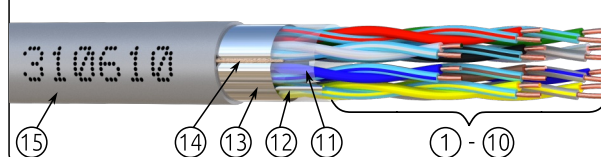
**elbaC Cable**

ZAC sous le Beer - RD 836  
F-27730 BUEIL (Eure - France)  
Tél : +33 (0)2 32 62 00 92  
Fax : +33 (0)2 76 01 31 80  
www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** ① - ⑩

Material	Annealed copper
Diameter	Ø 0.48 ± 0.008 mm
Area	0.18 mm <sup>2</sup>

**Insulation**

Material	HDPE
Diameter	Ø 0.85 mm

**Assembly**

10 pairs	
Colors	See color table
Lay length	See color table

**Mylar spiral** ⑪

Coverage	90 %
----------	------

**Drain wire** ⑫

Material	Tinned copper
Diameter	Ø 0.45 ± 0.008 mm

**Screen** ⑬

Material	Alu/PET (40µ/12µ)
Coverage	≥ 115 %

**Rip Cord** ⑭

	200D
--	------

**Sheath** ⑮

Material	PVC Grey Flame retardant IEC 332-1 (C2)
Diameter	Ø 7.00 ± 0.20 mm

**Mass**

	84 kg/km
--	----------

**Marking of sheath**

Printing	LY6ST/SYT+ 10P AWG24 - <b>CE</b> - with XXX : Quantity in meter still available per reel DDDDD : Date code
Color / Process	Black / Ink jet
Step	1 m

**Notes**

--	--

**Electrical characteristics**

Impedance	100 ± 20 Ω
Mutual paires capacitance	70 nF/km
Max conductor DC resistance	96 Ω/km
Propagation velocity ratio	65%
Rated voltage	200V
Insulation resistance 20°C	> 500MΩ.km

**Performances**

Frequency MHz	Max attenuation dB/100m
1.00	3.00

Frequency MHz	NEXT dB
2.00	40.00

**Color table**

Pairs	Colors	
	A	B
①	Light blue/White	White
②	Light blue/Dark blue	Dark blue
③	Light blue/Yellow	Yellow
④	Light blue/Brown	Brown
⑤	Light blue/Black	Black
⑥	Light blue/Red	Red
⑦	Light blue/Green	Green
⑧	Grey/White	White
⑨	Grey/Blue	Dark blue
⑩	Grey/Yellow	Yellow

According to NF C93-529

**Meet Standards**

Fire performance :	IEC 60332-1
Environment :	European directive 2011/65/EU
Marking :	<b>CE</b>
Fire reaction :	EN 50575:2014/A1:2016

**Thermal characteristics**

CPR fire reaction class	E <sub>ca</sub>
Rated temperature	-15 / 70°C

**Mechanical characteristics**

Static ( d = sheath diameter )	r = 6 × d
Dynamic ( d = sheath diameter )	r = 12 × d

**Packaging**

- B1	: 100m / Carton Box
- W5	500m / Wooden Drum