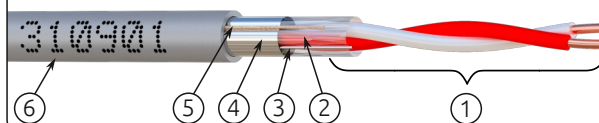
**elbaC Cable**

ZAC sous le Beer - RD 836
F-27730 BUEIL (Eure - France)
Tél : +33 (0)2 32 62 00 92
Fax : +33 (0)2 76 01 31 80
www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** ①

Material	Annealed copper
Diameter	Ø 0,78 mm
Area	0,48 mm ²

Insulation

Material	HDPE
Diameter	Ø 1,30 mm

Assembly**1 pair**

Colors	See color table
Lay length	

Mylar spiral ②

Coverage	90 %
----------	------

Drain wire ③

Material	Tinned copper
Diameter	Ø 0,45 ± 0,008 mm

Screen ④

Material	Alu/PET (40µ/12µ)
Coverage	≥ 125 %

Rip Cord ⑤

	200D
--	------

Sheath ⑥

Material	PVC Grey Flame retardant IEC 332-1
Diameter	Ø 4,50 mm

Mass

	29 kg/km
--	----------

Marking of sheath

Printing with XXX : Quantity in meter still available per reel DDDDD : Date code	SYT+ / LY9ST 1P AWG20 - elbaC 310901 - DDDDD - XXX m
Color / Process	Black / Ink jet
Step	1 m

Notes

--

Electrical characteristics

Impedance	100 ± 20 Ω
Mutual paires capacitance	70 nF/km
Max conductor DC resistance	39 Ω/km
Propagation velocity ratio	65%
Rated voltage	200V
Insulation resistance 20°C	> 500MΩ.km

Performances

Frequency MHz	Max attenuation dB/100m	NEXT dB
0.001	0.200	70
0.040	0.350	66
0.150	0.850	57
0.300	1.300	53
1.000	2.500	45
2.000	3.500	40

Color table

Colors		Lay length (mm)
A	B	
White	Red	20 mm

According to NF C93-529

Meet Standards

Fire performance :	IEC 60332-1
Environment :	European directive 2011/65/EU
Marking :	CE
Fire reaction :	EN 50575:2014/A1:2016

Thermal characteristics

CPR fire reaction class	E _{ca}
Rated temperature	-15 / 70°C

Mechanical characteristics

Static (d = sheath diameter)	r = 6 × d
Dynamic (d = sheath diameter)	r = 12 × d

Packaging

- B1	: 100m / Carton Box
- W5	: 500m / Wooden Drum