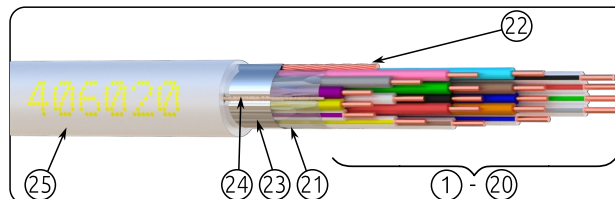
**elbaC Cable**

ZAC sous le Beer - RD 836  
F-27730 BUEIL (Eure - France)  
Tél : +33 (0)2 32 62 00 92  
Fax : +33 (0)2 76 01 31 80  
www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** (1) - (20)

Material	Annealed Copper
Diameter	1 × Ø 0.50 ± 0.025 mm
Area	0.20 mm <sup>2</sup>

**Insulation**

Material	PVC
Diameter	Ø 1.00 mm

**Assembly**

20 Conductors	
Colors	See color table

**Mylar spiral** (21)

Coverage	≥ 90 %
----------	--------

**Drain wire** (22)

Material	Annealed Copper
Diameter	1 × Ø 0.50 ± 0.025 mm
Area	0.20 mm <sup>2</sup>

**Screen** (23)

Material	Alu/Polyester Tape
Coverage	≥ 115 %

**Rip Cord** (24)**Sheath** (25)

Material	PVC White - RAL 9016
Diameter	Ø 6.70 ± 0.20 mm

Mass	102 kg/km
------	-----------

**Marking of sheath**

Printing with XXX : Quantity in meter still available per reel DDDDD : Date code	Alarme R 20C - <b>CE</b> - elbaC 406020 - DDDDD - XXX m
--	--

Color / Process	Yellow / Ink jet
-----------------	------------------

Step	1 m
------	-----

**Electrical characteristics**

Max conductor DC resistance	< 104.5 Ω/km
Rated voltage	30 V
Insulation resistance 20°C	> 200 MΩ.km

**Color table**

Condu.	Colors	Condu.	Colors
(1)	Black	(11)	Pink
(2)	Red	(12)	Light Blue
(3)	White	(13)	White/Black
(4)	Green	(14)	White/Red
(5)	Brown	(15)	White/Green
(6)	Blue	(16)	White/Grey
(7)	Orange	(17)	White/Blue
(8)	Yellow	(18)	White/Brown
(9)	Purple	(19)	White/Yellow
(10)	Grey	(20)	White/Purple

**Meet Standards**

Environment :	European directive 2011/65/EU
Marking :	<b>CE</b>
Fire reaction :	EN 50575:2014/A1:2016 E <sub>ca</sub>
Fire performance :	IEC 60332-1 NF C 32-070 Classe C2

**Thermal characteristics**

CPR fire reaction class	E <sub>ca</sub>
Rated temperature	80°C

**Packaging**

- B1 : 100m / Carton Box

**Notes**

Barcode of 406020-B1