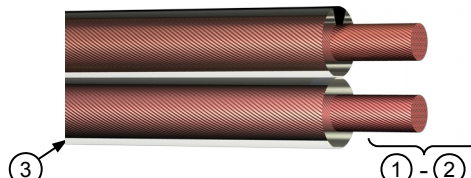
**elbaC Cable**

ZAC sous le Beer – RD 836
 F-27730 BUEIL
 Tel : +33 (0)2 32 62 00 92
 Fax : +33 (0)2 76 01 31 80
 www.elbac.fr / info@elbac.fr

**Construction****Inner conductor** ① - ②

Material	OF Bare Annealed Copper
Diameter	42 × Ø 0.15 ± 0.005 mm
Section	0.75 mm ²

Dielectric

Material	Extra flexible transparent PVC
Color	See color table
Diameter	2 × Ø 2.1 ± 0.2mm
Thickness	> 0.50mm

Assembly

Construction	Shotgun type cable
--------------	--------------------

Mass	to define kg/km
-------------	-----------------

Marking on sheath ③

Printing <small>with XXX quantity in meter still available per reel DDDDD: Date code</small>	CABLE HAUT PARLEUR 2×0.75mm ² OFC - CE - elbaC 842207 - DDDDD - XXX m
---	---

Color / Process	Black / Ink jet
-----------------	-----------------

Step	1 m
------	-----



Meet Standards

European directive 2011/65/EU

Electrical characteristics**Max DC resistance**

Inner Conductor	24 Ω/km
Rated Voltage	250 V
Test Voltage	2000 V
Capacitance cond/cond	< 99 pF/m

Color table

Colors	
Conductor	
①	Transparent 
②	Transparent with black line 

Thermal characteristics

CPR fire reaction class	Fca
Dynamic use	-5°C to 50°C
Rated Temperature	-30°C to 70°C

Packaging

-P1	: 100 m / Plastic drum
-W5	: 500 m / Wooden drum

Notes