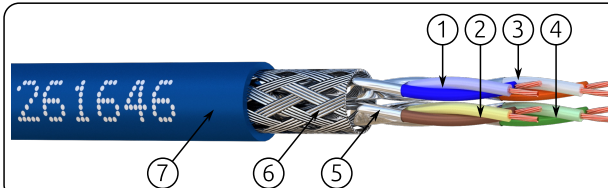
**elbaC Cable**

ZAC sous le Beer - RD 836  
F-27730 BUEIL (Eure - France)  
Tél : +33 (0)2 32 62 00 92  
Fax : +33 (0)2 76 01 31 80  
www.elbac.fr / info@elbac.fr

**Construction****Inner conductor**

Material	Annealed copper
Diameter	$7 \times \varnothing 0.16 \pm 0.005$ mm

**Insulation**

Material	PEHD+PP Gas injected
Diameter	$\varnothing 1.02 \pm 0.05$ mm

**Screening** ⑤

Material	Alu/PET thick film (Alu side out)
Coverage	$\geq 125\%$

**Assembly**

4 shielded twister pairs

①		Blue / Light Blue
②		Brown / Light Yellow
③		Orange / White
④		Green / Light Green

**Overall braiding** ⑥

Material	Tinned copper
Construction	$16 \times (4 \times \varnothing 0.10 \pm 0.003$ mm )
Coverage	40%

**Sheath** ⑦

Material	LSZH Blue RAL 5017
Diameter	$\varnothing 6.0 \pm 0.2$ mm

**Weight**

Linear mass	37.4 kg/km
-------------	------------

**Marking of sheath**

Printing with XXX : Quantity in meter still available per reel DDDDD : Date code	S/FTP CAT6A 500MHz PATCH LSZH - 4 PAIRS - ISO/11801 - TIA/EIA 568B - elbaC 261646 - DDDDD - XXXm
--	---

Color / Process	White / Ink jet
-----------------	-----------------

Step	1 m
------	-----

**Meet Standards**

Electrical :	EIA/TIA 568B ISO/IEC 11801
Fire performance :	IEC 60332-1 NF C 32-070 Classe C2
Fire reaction :	EN 50575:2014/A1:2016
Smoke density :	IEC 61034
Halogen free :	IEC 60754
Marking :	<b>CE</b>
Environment :	European directive 2011/65/EU

**Electrical characteristics**

Impedance	1 - 100MHz	$100 \pm 15 \Omega$
	100- 250 MHz	$100 \pm 20 \Omega$
	250 -500 MHz	$100 \pm 25 \Omega$

Max. conductor DC resistance	$< 158.8 \Omega/\text{km}$
------------------------------	----------------------------

Propagation velocity	79%
----------------------	-----

**Performances**

Frequency MHz	Max attenuation dB/100m	RL dB	NEXT dB
1.0	3.1	20.0	75.3
4.0	5.8	23.0	66.3
10.0	9.0	25.0	60.3
16.0	11.4	25.0	57.2
31.25	16.1	23.6	52.9
62.5	23.3	21.5	48.4
100.0	29.9	20.1	45.3
250.0	49.7	17.3	39.3
500.0	74.1	15.2	34.8

Frequency MHz	PS NEXT dB	ELFEXT dB	PS ELFEXT dB
1.0	72.3	68.0	65.0
4.0	63.3	56.0	53.0
10.0	57.3	48.0	45.0
16.0	54.2	43.9	40.9
31.25	49.9	38.1	35.1
62.5	45.4	32.1	29.1
100.0	42.3	28.0	25.0
250.0	36.3	20.0	17.0
500.0	31.8	14.0	11.0

**Thermal characteristics**

CPR fire reaction class	E <sub>ca</sub>
Rated temperature	70°C

**Mechanical characteristics**

Bending radius - installed	40 mm
Bending radius - during installation	50 mm

**Packaging**

Cord from 0.50cm to 20m